


高透磁吸波材 XK-A100

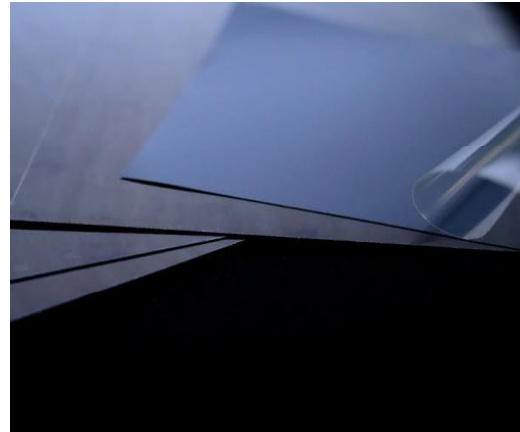

XK-A100 為高導磁材料

於 300MHz~6GHz 頻率範圍內可有效吸收電磁輻射及磁場干擾

適用於解決電子裝置產生的電磁干擾或射頻干擾

	unit	XK-A100
Permeability μ' (1MHz)	-	100
Permeability μ' (13.56MHz)	-	87
Loss μ'' (13.56MHz)	-	24
Thermal Conductivity	W/mk	0.4
Specific Gravity	g/cm ³	3.7
Volume Resistivity	$\Omega \cdot \text{cm}$	$>10^6$
Application temperature	$^{\circ}\text{C}$	-40~100
Flammability	UL 94	V-0
Thickness	mm	0.05~0.50 mm
RoHS	-	Compliant
Halogen	-	free
PVC	-	free
Lead	-	free
Red phosphorus	-	free
		High magnetic permeability